












# AC 127

Self Contained Ice machine up to 70 kg

	<p><b>CHARACTERISTICS</b></p> <ul style="list-style-type: none"> <li>• Production of single Gourmet cubes with a truncated cone shape.</li> <li>• External finish in stainless steel.</li> <li>• Electronic control.</li> <li>• Front airflow for air-cooled model for undercounter installations.</li> <li>• Easy-access front ON/OFF switch.</li> <li>• Clean Alert: A flashing light alerts you when it's time to clean the filter.</li> <li>• Door closing system equipped with anti-noise rubber pads.</li> </ul>																		
<div style="display: flex; flex-direction: column; align-items: flex-start;"> <div style="margin-bottom: 20px;">  <p><b>AC M</b> Medium Gourmet 20 g Ø 30 mm - H 34 mm</p> </div> <div>  <p><b>AC L</b> LARGE GOURMET 39 g Ø 38 mm - H 41 mm</p> </div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 20px;"> <thead> <tr> <th>Model</th> <th>Cube</th> <th>Ø</th> <th>H</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>AC M</td> <td>Medium</td> <td>30 mm</td> <td>34 mm</td> <td>20 g</td> </tr> <tr> <td>AC L</td> <td>Large</td> <td>38 mm</td> <td>41 mm</td> <td>39 g</td> </tr> </tbody> </table> </div>	Model	Cube	Ø	H	Weight	AC M	Medium	30 mm	34 mm	20 g	AC L	Large	38 mm	41 mm	39 g	<p><b>CONDENSING SYSTEM</b> Air condensation Water condensation</p> <hr/> <p><b>REFRIGERANT GAS</b> R290</p> <hr/> <p><b>VOLTAGE V/HZ/PH</b> 230\50\1 220-240\60\1</p>	<p><b>BIN CAPACITY</b></p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <td style="text-align: center;">KG</td> </tr> <tr> <td style="text-align: center;">23</td> </tr> </table>	KG	23
Model	Cube	Ø	H	Weight															
AC M	Medium	30 mm	34 mm	20 g															
AC L	Large	38 mm	41 mm	39 g															
KG																			
23																			
<p><b>CERTIFICATIONS</b></p> <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 10px;">        </div>	<p style="text-align: center;"><b>OPERATIONAL REQUIREMENTS</b></p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th></th> <th style="text-align: center;">Minimum</th> <th style="text-align: center;">Maximum</th> </tr> </thead> <tbody> <tr> <td>Air temperature</td> <td style="text-align: center;">10</td> <td style="text-align: center;">43</td> </tr> <tr> <td>Water temperature</td> <td style="text-align: center;">5</td> <td style="text-align: center;">38</td> </tr> <tr> <td>Water pressure</td> <td style="text-align: center;">1 bar (14 psi)</td> <td style="text-align: center;">5 bar (70 psi)</td> </tr> <tr> <td>Voltage</td> <td style="text-align: center;">-10%</td> <td style="text-align: center;">+10%</td> </tr> </tbody> </table>			Minimum	Maximum	Air temperature	10	43	Water temperature	5	38	Water pressure	1 bar (14 psi)	5 bar (70 psi)	Voltage	-10%	+10%		
	Minimum	Maximum																	
Air temperature	10	43																	
Water temperature	5	38																	
Water pressure	1 bar (14 psi)	5 bar (70 psi)																	
Voltage	-10%	+10%																	
<p><b>IMPORTANT NOTE</b> Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.</p>	<p style="text-align: center;"><a href="http://www.scotsman-ice.it">www.scotsman-ice.it</a></p>																		

# AC 127

Self Contained Ice machine up to 70 kg

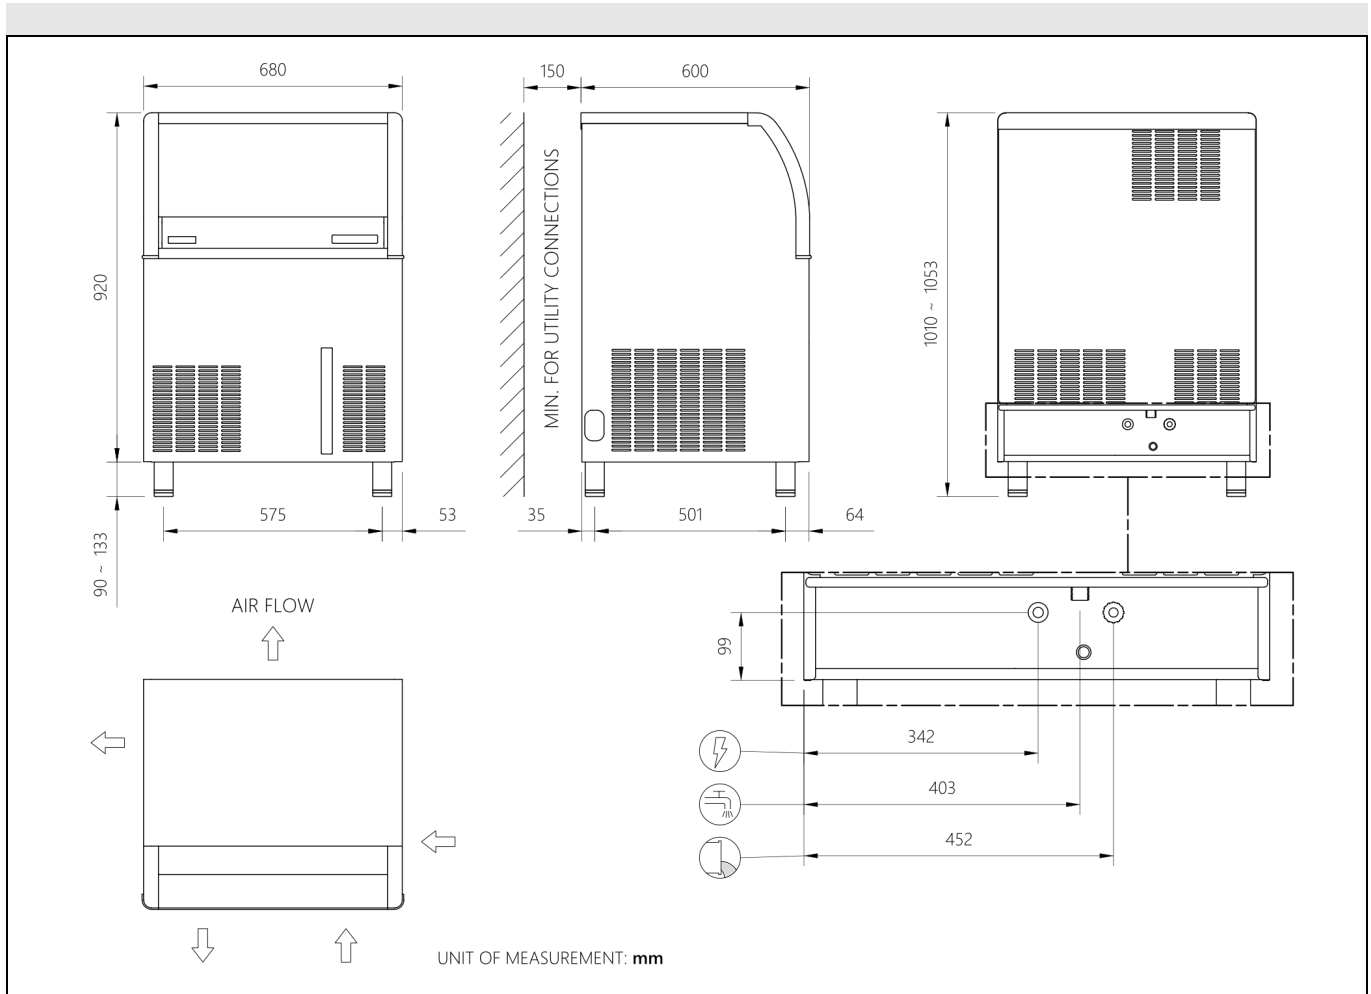

## MACHINE DATA

Dimensions (LxWxH): 680 x 600 x 1010 mm  
Net weight 52 kg

## SHIPPING DATA

Dimensions (LxWxH): 75 x 67 x 110 cm  
Peso netto 62 kg

(\*) The data refers to the following temperature conditions:  
32°C Ambient / 21°C Water

Version	Voltage	Condensation	Ice production kg in 24 h			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
			10°C/10°C	21°C/10°C	32°C/21°C						
ACL 127 AS 230/50/1	230\50\1	A	63	58	49	1,10	13,0	10,0	650	1,50	10
ACL 127 WS 230/50/1	230\50\1	W	60	54	47	1,00	10,0	77,0	450	1,50	10
ACM 127 AS 230/60/1	220- 240\60\1	A	70	67	59	1,40	12,0	9,0	695	1,50	10
ACM 127 AS 230/50/1	230\50\1	A	70	68	52	1,10	11,0	8,0	650	1,50	10
ACM 127 WS 230/50/1	230\50\1	W	75	71	62	1,10	10,0	49,0	490	1,50	10