AC 227

Self Contained Ice machine up to 165 kg

Scotsman
Ice Systems

CHARACTERISTICS

- Production of single Gourmet cubes with a truncated cone shape.
- External finish in stainless steel.
- Electronic control.
- Front airflow for air-cooled model for undercounter installations.
- Easy-access front ON/OFF switch.
- Clean Alert: A flashing light alerts you when it's time to clean the filter.
- Door closing system equipped with anti-noise rubber pads.

AC S
Little Gourmet 8 g
Ø 21 mm - H 25 mm

AC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

AC L
LARGE GOURMET 39 g
Ø 38 mm - H 41 mm

Model	Cube	Ø	H	Weight
AC S	Small	21 mm	25 mm	8 g
AC M	Medium	30 mm	34 mm	20 g
AC L	Large	38 mm	41 mm	39 g

CONDENSING SYSTEM

Air condensation
Water condensation

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1
220-240\60\1

BIN CAPACITY

KG
70

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%

IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

AC 227

Self Contained Ice machine up to 165 kg

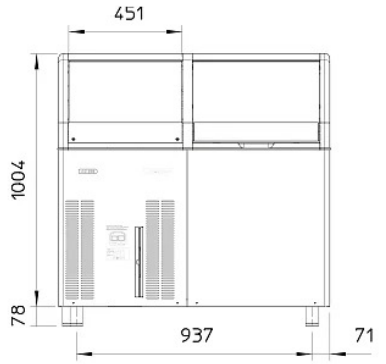

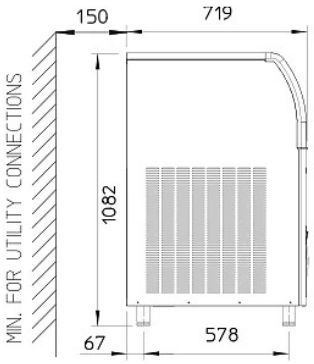



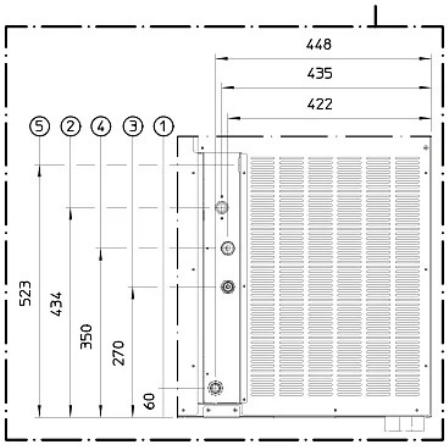



UNITÀ DI MISURA: **mm**

1. Ø 20 mm SCARICO VASCHETTA
2. 3/4" GAS - ENTRATA ACQUA
3. 3/4" GAS - SCARICO ACQUA SOLO RAFFREDD. ACQUA
4. 3/4" GAS - ENTRATA ACQUA SOLO RAFFREDD. ACQUA
5. CAVO DI ALIMENTAZIONE

MACHINE DATA
Dimensions (LxWxH): 1078 x 715 x 1083 mm
Net weight 96 kg

SHIPPING DATA
Dimensions (LxWxH): 115 x 78 x 116 cm
Peso netto 113 kg

(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
ACL 227 AS 230/50/1	230\50\1	A	150	145	130	2,80	28,0	14,0	1400	1,50	10
ACL 227 WS 230/50/1	230\50\1	W	120	145	130	3,60	24,0	181,0	1075	1,50	10
ACM 227 AS 230/60/1	220-240\60\1	A	170	165	135	2,80	28,0	20,0	1385	1,50	10
ACM 227 AS 230/50/1	230\50\1	A	165	160	130	2,80	28,0	21,0	1400	1,50	10
ACM 227 WS 230/50/1	230\50\1	W	170	165	150	3,60	24,0	168,0	1075	1,50	10
ACS 227 AS 230/50/1	230\50\1	A	164	159	121	2,90	30,0	22,0	1530	1,50	16